

DÉ NIEUWE GENERATIE STARTACCU

SUPER B 2300



Gybe introduceert de **super B**:
een revolutionair nieuw type startaccu,
speciaal ontwikkeld voor motoren en ATV's.

De **super B** is lichter, kleiner en beter
dan de bestaande lood/zuur accu.



Hans Vogels

LAGER IN GEWICHT

Minder dan 450 gram

KLEINER IN VOLUME

114 mm x 35 mm x 81,25 mm (LxBxH)

LANGERE LEVENSDUUR

Meer dan 5 jaar

LAADT VELE MALEN SNELLER

45 tot 60 minuten



LAGE ZELFONTLADING



SUPER B

simply better battery

De **super B** werkt op basis van lithium ion-cellen en kan tot 120 ampère piekstroom gedurende 10 seconden, of 70 ampère continu genereren.

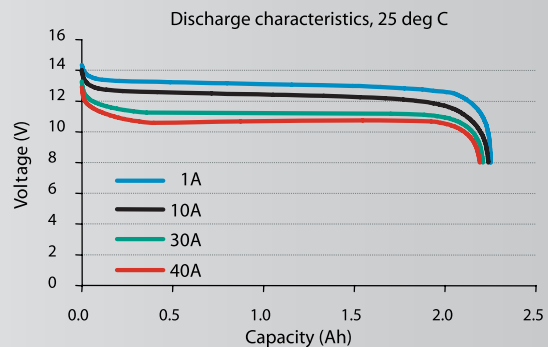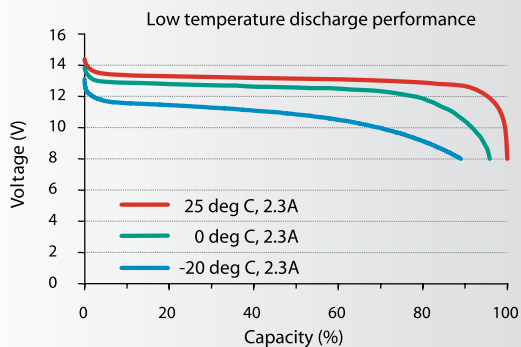

Door meegeleverde stekker past de super B op ieder type Motor

Nominal capacity and voltage	2300 mAh, 13.2 V
Recommended standard charge method	3A to 14.4 CCCV, 45 min
Recommended fast charge current	10A to 14.4 CCCV, 15 min
Maximum continuous discharge	70A
Pulse discharge at 10 sec	120A
Recommended charge and cut-off V at 25oC	14.4V to 8V
Recommended charge and cut-off V below 0oC	15.2V to 2V
Operating temperature range	-30°C to +60°C
Storage temperature range	-50°C to +60°C
Battery weight	< 450 grams



Uw dealer: