

DÉ NIEUWE GENERATIE STARTACCU

SUPER B 4600



Gybe introduceert de **super B**:
een revolutionair nieuw type startaccu,
speciaal ontwikkeld voor motoren.

De **super B** is lichter, kleiner en beter
dan de bestaande lood/zuur accu.



Fabian Foret

LAGER IN GEWICHT

Minder dan 900 gram

KLEINER IN VOLUME

114 mm x 62 mm x 81,25 mm (LxBxH)

LANGERE LEVENSDUUR

Meer dan 5 jaar

LAADT VELE MALEN SNELLER

45 tot 60 minuten



LAGE ZELFONTLADING



SUPER B

simply better battery

De **super B** werkt op basis van lithium ion-cellen en kan tot 240 ampère piekstroom gedurende 10 seconden, of 140 ampère continu genereren.

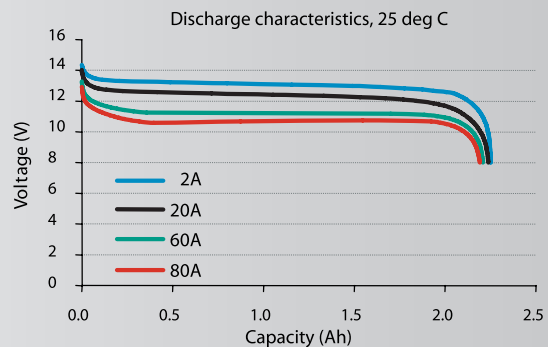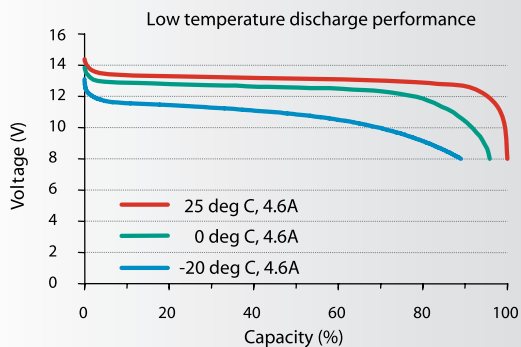

Door meegeleverde stekker past de super B op ieder type Motor

Nominal capacity and voltage	4600 mAh, 13.2 V
Recommended standard charge method	6A to 14.4 CCCV, 45 min
Recommended fast charge current	20A to 14.4 CCCV, 15 min
Maximum continuous discharge	140A
Pulse discharge at 10 sec	240A
Recommended charge and cut-off V at 25oC	14.4V to 8V
Recommended charge and cut-off V below 0oC	15.2V to 2V
Operating temperature range	-30°C to +60°C
Storage temperature range	-50°C to +60°C
Battery weight	< 900 grams



Uw dealer: